

ISUZU

GIGA



PRIME MOVER

GCW 39,000kg

**GXR
360**



FREE SERVICE CAMPAIGN
UP TO 100,000km*
*Terms and Conditions apply.
ISUZU

ISUZU DOCTOR MOBILE
24 HOUR ASSISTANCE
Reliable support with round-the-clock business operation.
1-800-88-8000



*** FULL AIR BRAKE ***
AUTO ADJUSTER

SPECIFICATIONS

GXR360

| | | |
|----------------------------------|--------------|----------------------------------------------------------------------------------------------------|
| MODEL CODE | | GXR7UU |
| Drive Train | | 4 x 2 |
| ENGINE | | |
| Model | | 6UZ1-TCC |
| Type | | 6-Cylinder In-line, 4 Cycle, Water-Cooled, OHC, Turbocharger with Intercooler |
| Displacement | cc | 9,839 |
| Bore x Stroke | mm | 120 x 145 |
| Compression Ratio | | 17.5 : 1 |
| Maximum Output | kW (PS)@rpm | 265 (360)@2,000 |
| Maximum Torque | Nm (kgm)@rpm | 1422 (145)@1,400 |
| Emission Level | | Euro 3 |
| Fuel System | | Common Rail Direct Injection |
| TRANSMISSION | | |
| Model / No. of Speed | | ZF9S1310, 9 Speed Manual |
| Gear Ratio | C | 9.479 |
| | 1st | 6.576 |
| | 2nd | 4.678 |
| | 3rd | 3.478 |
| | 4th | 2.617 |
| | 5th | 1.890 |
| | 6th | 1.345 |
| | 7th | 1.000 |
| | 8th | 0.752 |
| | Reverse | 8.967 |
| | Final | 5.429 |
| WEIGHT & CAPACITIES | | |
| Gross Vehicle Weight (Design) | kg | 19,000 |
| Gross Combine Vehicle Weight | kg | 39,000 |
| Curb Weight | kg | 6,063 |
| Front | kg | 4,008 |
| Rear | kg | 2,055 |
| Fuel Tank Capacity | l | 400 (Aluminium Alloy) |
| AXLE | | |
| Front | Type | Reverse Elliot; I Beam |
| Front Axle Capacity (Design) | kg | 7,500 |
| Rear | Type | Banjo, Full Floating |
| Rear Axle Capacity (Design 1) | kg | 13,000 |
| Rear Axle Capacity (Design 2) | kg | - |
| Total Axle Capacity (Design 1+2) | kg | 13,000 |
| SUSPENSION SYSTEM | | |
| Suspension | Front | Semi Elliptical Alloy Steel Leaf Springs Hydraulic Double Acting Telescopic Shock Absorber |
| | Rear | Semi Elliptical Alloy Steel Leaf Springs Hydraulic Double Acting Telescopic Shock Absorber |
| TYRES & WHEELS | | |
| Tyres | | 295 / 80R22.5 |
| Wheels | | 22.5 x 8.25 (ISO 10 Studs) |
| BRAKES | | |
| Service | | Full Air with Anti-Lock Braking System (ABS), Auto Adjuster |
| Parking Brake Type | | Spring Acting, Rear Wheel Parking |
| Auxiliary | | Exhaust Brake |
| STEERING | | |
| Steering System | | Power Assisted, Hydraulic Integral, Recirculating Ball, Energy Absorbing, Tilt & Telescopic Column |
| Min. Turning Radius | m | 6.3 |
| ELECTRICAL | | |
| Battery | | 12V x 2 |
| Alternator | | 24V-60A |
| DIMENSION | | |
| Overall Length | OAL mm | 5,991 |
| Overall Width | OAW mm | 2,490 |
| Overall Height | OAH mm | 2,989 |
| Wheelbase | WB mm | 3,480 |
| Front Overhang | FOH mm | 1,480 |
| Rear Overhang | ROH mm | 1,031 |
| Front Tread | AW mm | 2,065 |
| Rear Tread | CW mm | 1,850 |

ISUZU

ISUZU MALAYSIA SDN BHD 200401026438 (664846-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.

GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779

HOTLINE: 1-300-88-1133 www.isuzu.net.my

 IsuzuTrucksMalaysia

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASAU, SECTION 17,
40000 SHAH ALAM, SELANGOR DARUL EHSAN.

PHONE: 03-5513 0518

FAX: 03-5512 7550

PERFORMANCE







6UZ1-TCC

Displacement: **9,839cc**

Max. Output: **360ps @2,000rpm**

Max. Torque: **1422Nm (145KgM)
@1,400rpm**

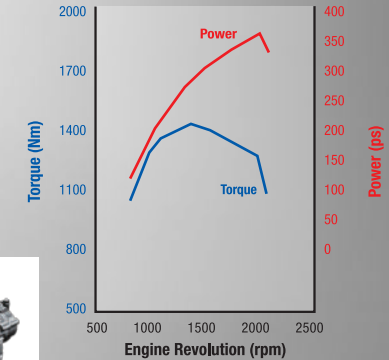


▲ ZF 9-Speed Transmission with Crawler Gear.

EXTERIOR



▲ Bigger and durable aluminium alloy fuel tank with lockable cap.

SAFETY

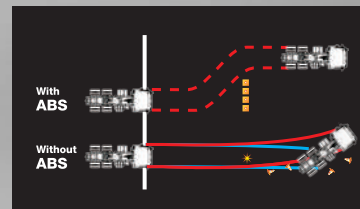

▲ Anti-Lock Braking System (ABS).



▲ Full Air Wedge Brake with Auto Adjuster.

Dealer's information

ISUZU
GENUINE PARTS

ISUZU
BEST VALUE PARTS