

# ISUZU

# FORWARD *Auto*



## SAFETY PLUS

**SRS**  
AIRBAG

**ABS**  
ANTI-LOCK BRAKING SYSTEM

 **IMMOBILIZER**

4x2 RIGID  
GVW 19,000kg

**FVR**  
**240**



EURO 4



**FREE**  
SERVICE CAMPAIGN  
 **ISUZU**

Product image for illustration purposes only. Actual product may vary.

# SPECIFICATIONS

# FVR240

MODEL CODE	FVR34UU-PDP	
Drive Train	4 x 2	
ENGINE	6HK1-TCN	
Model	6-Cylinder InLine, 4 Cycle, Water-Cooled	
Type	OHC, Variable Geometry System (VGS) Turbocharger with Intercooler	
Displacement	cc	7,790
Maximum Output (Gross)	kW (PS) @ rpm	177 (240) @ 2400
Maximum Torque	Nm (kgfm) @ rpm	706 @ 1450
Emission Level	Euro 4	
Fuel System	Commonrail Direct Injection	
After Treatment Exhaust Gas	DOC (Diesel Oxidation Catalyst)	
TRANSMISSION	ALLISON 3000	
Model / No. of Speed	6-Speed AT	
Gear Ratio		
	1st	3.486
	2nd	1.864
	3rd	1.409
	4th	1.000
	5th	0.749
	6th	0.652
	Reverse	5.027
	Final	6.170
WEIGHT & CAPACITIES		
Gross Vehicle Weight	kg	19,000
Curb Weight	kg	5,445
Front	kg	3,080
Rear	kg	2,365
Fuel Tank Capacity	l	200
AXLE		
Front	Type	Reverse Elliot, I-Beam
Front Axle Capacity (Design)	kg	7,500
Rear	Type	Banjo, Full Floating
Rear Axle Capacity (Design)	kg	13,000
SUSPENSION SYSTEM		
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber
	Rear	Semi Elliptical Alloy Steel Leaf Spring
TYRES & WHEELS		
Tyres	295/80R22.5	
Wheels	22.5 x 8.25	
BRAKES		
Service	Type	Full Air 'S-Cam' Front and Rear Drum Brakes
Parking Brake Type	Spring Park Brake Acting on all Rear Wheels	
Auxiliary	Exhaust Brake	
STEERING		
Steering System	Power Assist, Hydraulic Integral Recirculating Ball Type	
Min. Turning Radius	m	10.2
ELECTRICAL		
Battery	65D26L x 2	
Alternator	24V-60A	
OTHER SAFETY		
Active Safety	Anti-Locking Brake System (ABS)	
	Cab Tilt Warning (CTW)	
Passive Safety	Driver Supplemental Restraint System (SRS)	
	Driver Seatbelt Pre-tensioner	
Security	Central Locking with Remote Keyless Entry and Immobiliser	
DIMENSION		
Overall Length	mm	8,655
Overall Width	mm	2,490
Overall Height	mm	2,890
Wheelbase	mm	5,060
Front Overhang	mm	1,255
Rear Overhang	mm	2,340
Front Tread	mm	2,090
Rear Tread	mm	1,850

# TESTED AND PROVEN POWERTRAIN



## FVR 240

6HK1-TCN

Displacement: 7,790cc

Max. Output (Gross): 177kW (240ps) @ 2,400rpm

Max. Torque: 706Nm @ 1,450rpm


**Auto**

**240PS**  
Max Power


**706Nm**  
Flat Torque

**EURO 4**

# CLASS-LEADING SAFETY AND LONG TERM COST SAVINGS

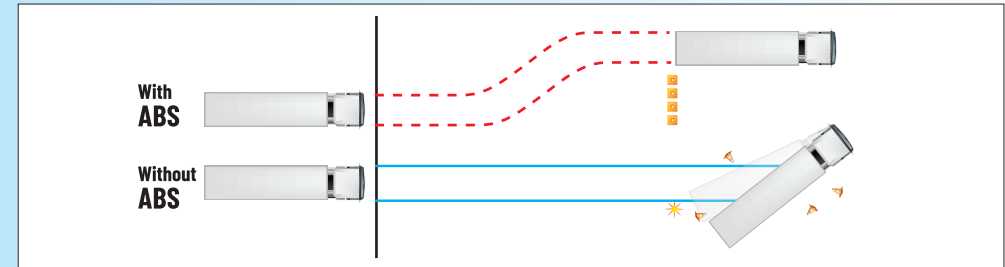

Anti-Lock Braking System (ABS)

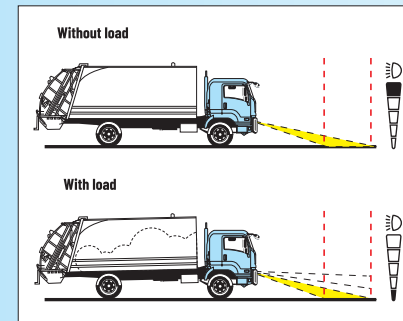


Headlight leveling. Preferred headlight beam position can be maintained when truck is loaded and when it has no load



Hot Shift PTO with external speed controller and safety features



Allison electronic control with digital display



Cabin Tilt Warning & Buzzer for driver safety warning



Brand New Feature - USB Charging Port



LED Headlight to provide better visibility

Dealer's information

**ISUZU**

ISUZU MALAYSIA SDN BHD 200401026438 (664946-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,  
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.

GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779

HOTLINE: 1-300-88-1133 www.isuzu.net.my

[www.isuzu.net.my](https://www.isuzu.net.my)

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASAU, SECTION 16,  
40200 SHAH ALAM, SELANGOR DARUL EHSAN.

PHONE: 03-5513 0518

FAX: 03-5512 7550

**ISUZU**  
GENUINE PARTS

**ISUZU**  
BEST VALUE PARTS