

ISUZU

ELF



6 WHEELER 4x4

GVW 7,500kg

**NPS
4x4**



EURO 4



**FREE
SERVICE CAMPAIGN**



ISUZU

Product image for illustration purposes only. Actual product may vary.

SPECIFICATIONS

NPS 4x4

MODEL CODE		NPS75UHL
Drive Train		4 x 4
ENGINE		
Model		4HK1-TCN
Type		4-Cylinder InLine, 4 Cycle, Water-Cooled OHC, VGS Turbo with Intercooler
Displacement	cc	5,193
Maximum Output (Gross)	kW (PS) @ rpm	114 (155) @ 2,600
Maximum Torque	Nm (kgfm) @ rpm	419 @ 1,600-2,600
Emission Level		Euro 4
Fuel System		Commonrail Direct Injection
TRANSMISSION		
Model / No. of Speed		MYV-5T
Gear Ratio		Manual 5-Speed
	1st	5.315
	2nd	3.053
	3rd	1.655
	4th	1.000
	5th	0.721
	Reverse	5.068
	Final	5.571
WEIGHT & CAPACITIES		
Gross Vehicle Weight	kg	7,500
Curb Weight	kg	2,895
Front	kg	1,945
Rear	kg	950
Fuel Tank Capacity	l	100
AXLE		
Front	Type	Single Banjo, Full Floating with Manual Lock Hub
Front Axle Capacity (Design)	kg	3,100
Rear	Type	Banjo, Full Floating
Rear Axle Capacity (Design)	kg	6,600
SUSPENSION SYSTEM		
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber
	Rear	Semi Elliptical Alloy Steel Leaf Spring with Double Acting Telescopic Shock Absorber
TYRES & WHEELS		
Tyres		8.5R17.5
Wheels		17.5 x 6.00-127
BRAKES		
Service	Type	Drum Brakes with Dual Circuit Hydraulic Control Vacuum Assistance and Load Sensing Proportioning Valve (LSPV)
Parking Brake Type		Transmission Mounted, Mechanical Operated Internal Expanding
Auxiliary		Exhaust Brake
STEERING		
Steering System		Power Assist, Recirculating Ball Type
Min. Turning Radius	m	6.9
ELECTRICAL		
Battery		80D26L x 2
Alternator		24V-90A
OTHER SAFETY		
Safety		Cab Tilt Warning (Single cab only)
Security		Central Locking with Remote Keyless Entry
DIMENSION		
Overall Length	mm	5,985
Overall Width	mm	2,120
Overall Height	mm	2,452
Wheelbase	mm	3,395
Front Overhang	mm	1,110
Rear Overhang	mm	1,510
Front Tread	mm	1,665
Rear Tread	mm	1,650
Cab to Axle Center	mm	2,792

TESTED AND PROVEN POWERTRAIN



NPS 4x4 4HK1-TCN

Displacement: 5,193cc
Max. Output (Gross): 114kW (155ps) @ 2,600rpm
Max. Torque: 419Nm @ 1,600 - 2,600rpm

155PS
Max Power

419Nm
Flat Torque

EURO 4

CLASS-LEADING SAFETY AND LONG TERM COST SAVINGS



Front free wheel hubs




Wider approach & departure angles

One piece straight chassis


Higher ground clearance



Bigger axle capacity

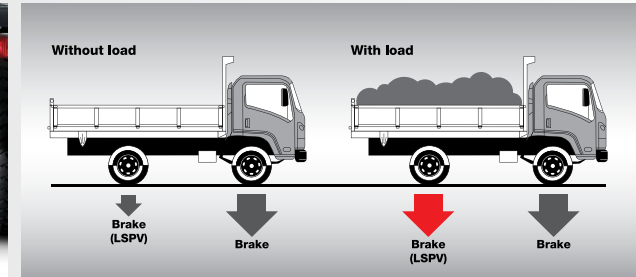

Load sensing proportioning valve (LSPV)

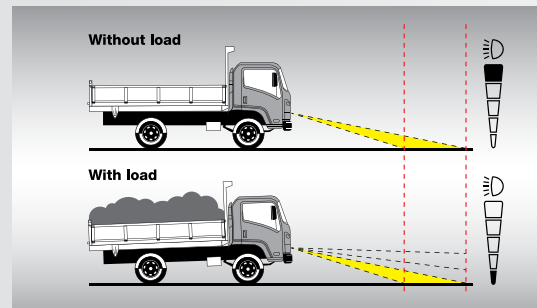

Headlight leveling. Preferred headlight beam position can be maintained when truck is loaded and when it has no load



4x4 Switch



ISUZU MALAYSIA SDN BHD 200401026438 (664946-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my

[f IsuzuTrucksMalaysia](#) [IsuzuTrucksMalaysia](#) [www.isuzu.net.my](#)

ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASAU, SECTION 16,
40200 SHAH ALAM, SELANGOR DARUL EHSAN.
PHONE: 03-5513 0518
FAX: 03-5512 7550

ISUZU
GENUINE PARTS

ISUZU
BEST VALUE PARTS

Dealer's information